



**Artesia Pump Station Improvements
Solicitation Number: CO-00448-RL
Job No.: 18-8603 and 14-6001**

**ADDENDUM 3
July 29, 2021**

To Bidder of Record:

This addendum, applicable to work referenced above, is an amendment to the bid proposal, plans and specifications and as such will be a part of and included in the Contract Documents. Acknowledge receipt of this addendum by entering the Addendum number and issue date on the space provided in submitted copies of the bid proposal.

RESPONSES TO QUESTIONS

1. Delete the Response provided to Question 28 in Addendum No. 2 and replace with the following:

Question: Ref Plan page M-02-103 – Note #2. Please verify if the intent of this note is to reuse the existing wall sleeve or to provide a new wall sleeve?

Response: The existing wall sleeves are intended to be protected and reused. See Changes to Drawings Item #1 within this Addendum.

CHANGES TO THE SPECIFICATIONS

None

CHANGES TO THE DRAWINGS

1. On Sheet 76 (M-02-103): Delete Note 2 in its entirety and Replace with the following:

“2. After removing existing piping, cut existing sleeves flush with the wall and grind to remove sharp edges. Contractor shall sandblast and coat the existing sleeve prior to pipe and modular casing seal installation. Contractor shall protect existing sleeves through demolition and construction activities to prevent damage. Damage requiring sleeve replacement for piping 42” and larger will be determined at the discretion of the Owner and Engineer and require cutting the full depth of the concrete walls (approximate wall depths of 3’-6” and 2’-8” for the 42” and 48” pipes respectively) and designing and constructing a new reinforced structural wall section anchored to the existing wall in the area of the repair.”

2. On Sheet 157 (E-02-603): Under Notes By Symbol, Revise the following:

- a. Delete Note 1 in its entirety and Replace with “Power for existing equipment shall be provided from new panelboard HA or HB. Refer to Sheet E-02-609 and E-02-610.”

- b. Delete Note 3 in its entirety and Replace with “Power for existing equipment shall be provided from new panelboard LA (Section 1 or 2). Refer to Sheet E-02-614. Ensure equipment voltage requirements are met before connecting.”
- c. Delete Note 4 in its entirety.
- d. On Panelboard Schedule P1 Revise Note 4 callout to Note 1.
- e. On Panelboard Schedule L1 Circuit L1-26, Add Note 3 callout.


CLARIFICATIONS

None

END OF ADDENDUM

This Addendum is two (2) pages in its entirety.

Attachments: None

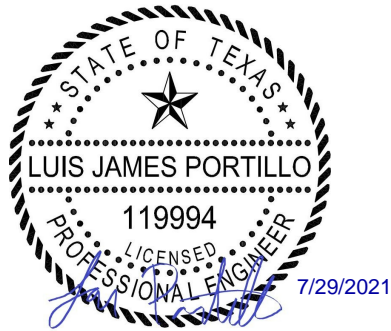

Luis James Portillo, P.E.
Black & Veatch