



**SAN ANTONIO WATER SYSTEM**  
**SUNSET GROUND STORAGE TANK**  
**PAINTING AND REHABILITATION PROJECT**  
**SAWS Job No. 11-0108**  
**SAWS Solicitation No. B-13-065-DD**

**ADDENDUM NO. 2**  
**October 9, 2013**

**To Respondent of Record:**

This addendum, applicable to work referenced above, is an amendment to the bidding documents and as such will be a part of and included in the Contract Documents. Acknowledge receipt of this addendum by entering the addendum number and issue date in the space provided in submitted copies of the proposal.

**A. Modifications to the Specifications**

1. SECTION 09910 – STEEL WATER STORAGE PAINTING

Page 09910-34, Add the following:

**“3.16 CLEANING**

**CONTRACTOR Performed Cleanup:** Site cleanup shall be provided by the CONTRACTOR on a daily, ongoing basis. Upon completion of the Work, the jobsite shall be left clean of all debris, blasting abrasive, or any other items resulting from the operations of the CONTRACTOR. Any asphalt paving damaged by the CONTRACTOR’S operations shall be replaced to new condition by the CONTRACTOR at no additional cost to the Owner.”

2. SECTION 13200 – STEEL WATER STORAGE TANK REHABILITATION

Page 13200-3, Paragraph 3.1, E. Delete paragraph in its entirety.

Page 13200-5, Paragraph 3.1, M. Delete paragraph in its entirety.


**B. Clarifications**

1. All interior ladders must be replaced with new carbon steel ladders.
2. New cable safety climb device must be made out of stainless steel.
3. Tank was built in 1991.

Each respondent is requested to acknowledge receipt of this Addendum No. 2 by his/her signature affixed hereto and to file same as an attachment to his/her proposal.



Byron G. Sanderfer, P.E., CFM  
Project Manager  
LNV, Inc.  
TBPE Firm No. F-366

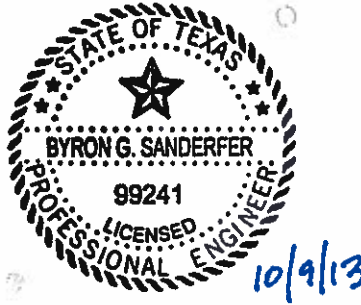

The undersigned acknowledges receipt of this Addendum No. 2 and the proposal submitted herewith is in accordance with the information and stipulation set forth.

\_\_\_\_\_

Date

\_\_\_\_\_

Signature of Bidder

**END OF ADDENDUM**