


RED AIRCRAFT FLASHING LIGHTS
IF REQUIRED BY FAA

36"X36" RIGGING RAILS
ACCESS HATCH

4 - 7.5' TALL X 1 1/2" DIA. EQUIPMENT
POLE ON HAND RAIL WITH CAP,
90° SPACING, SEE DETAIL SHEET
DD 903-16

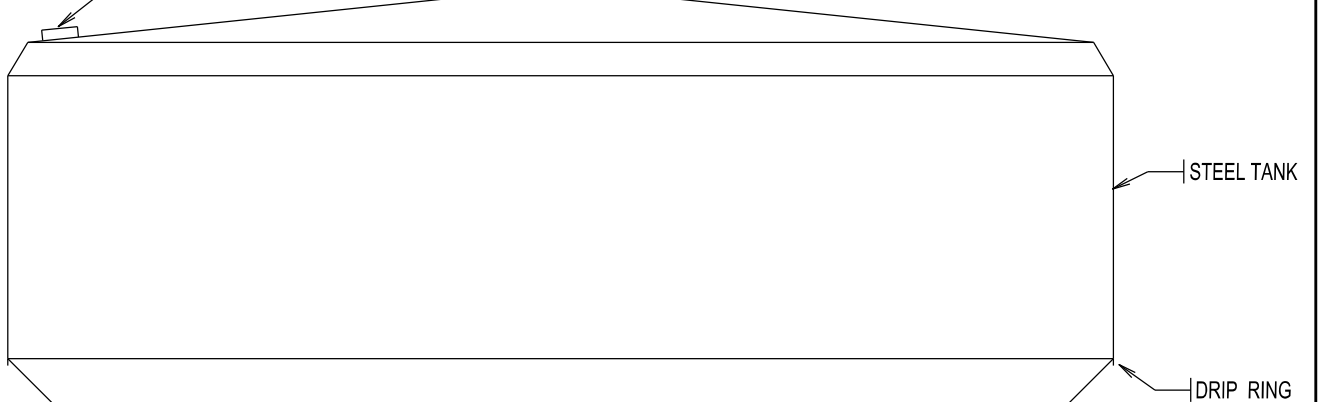

BOTTOM CONE SHALL BE DIRECTLY PROPORTIONAL TO THE SHELL
IN ORDER TO CONFORM TO THE TANK BOWL SHAPE AS SHOWN ON
THIS SHEET.

2'X3' REMOVABLE LOUVER
VENT WITH INSECT SCREEN

THE EXPOSED EXTERIOR SURFACE
OF THE CONCRETE SUPPORT WALL
IS DESIGNATED ARCHITECTURAL
CONCRETE.

EXTERIOR MOUNTED
LIGHT (TYP.)

14'X14' OVERHEAD ROLL-UP
VEHICLE DOOR WITH TYPE 2
NON-SACRIFICIAL ANTI-
GRAFFITI COATING (CLEAR)

TANK NAMEPLATE SEE
DETAIL SHEET DD 903-21

3'X7' PERSONNEL DOOR WITH
MEDECO TYPE 3 LOCKS AND
TYPE 2 NON-SACRIFICIAL ANTI-
GRAFFITI COATING (CLEAR)

LASER ENGRAVED
8"X10" S.S. PLATE
FOR P.O.E. SAMPLE
POINT

SEE SAMPLING TAP
DETAIL DD 903-11

UNIFORMED SURFACE OF
EXTERIOR SUPPORT WALL


CONCRETE BOLLARD (TYP.)
5' HIGH YELLOW W/6' PLASTIC
COVER, YELLOW W/RED RE-
FLECTORS. SEE DETAIL SHEET
DD 903-20

TANK OVERFLOW
SEE DETAIL SHEET
DD 903-10

TYPE 3 NON-SACRIFICIAL ANTI-GRAFFITI COATING
(CLEAR) APPLIED TO PEDESTAL WALL

DD-903-03

SAN ANTONIO WATER SYSTEM
SAN ANTONIO, TEXAS



APPROVED:
MARCH 2011

SHEET
1 OF 1

ELEVATED STORAGE TANK - ELEVATION

REVISED: