

San Antonio Water System Standard Specifications for Construction

ITEM NO. 869

Project Signs

869.1 DESCRIPTION: This item shall consist of the providing, installing, maintaining and removing of two 4' X 8' project signs.

869.2 REFERNCED STANDARDS: Reference standards cited in this Specification Item No. 869 refer to the current reference standard published at the time of the latest revision date logged at the end of this Specification Item No. 869, unless a date is specifically cited.

1. San Antonio Water System (SAWS):
 - a. Specifications for Water and Sanitary Sewer Construction
 - b. SAWS Materials Specifications
2. City Of San Antonio (COSA) Standard Specifications for Construction

869.3 MATERIAL: The signs shall be made of ¾" plywood, grade A-C or better and each shall be mounted on two 4" X 4" X 12'-0" posts.

869.4 CONSTRUCTION: The signs shall conform to the configuration and details indicated in Standard Drawing No. DD-869-01.

1. These signs shall be installed at locations to be determined by the SAWS Inspector.
2. Any additional signs required by other agencies (such as the City of San Antonio Public Works' Right-of-Way Division) shall also be installed as requested and directed by the SAWS Inspector.
3. The signs shall be erected at both ends of the project limits or as directed by the SAWS Inspector.
4. They shall remain in place until such time that the project has been accepted and finalized.
5. In cases of projects with multiple site locations, the signs shall be moved to subsequent sites after completion of work at each site, or two signs shall be installed at each work site.
6. The installation will require embedding all posts a minimum of 3 feet below the ground.

869.5 MEASUREMENT: Measurement of the Item, "Project Signs" as specified herein, will not be measured for payment.

869.6 PAYMENT: No direct payment will be made to the contractor for the work and materials required in providing, installing, maintaining and removing the signs.

1. Such work and materials shall be considered subsidiary to the several items of work for which unit prices are provided in the proposal.

End of Specification

Job No. **12-3456**  **San Antonio Water System** Cost: **\$1,234,567**

PROJECT NAME FIRST LINE
PROJECT NAME SECOND LINE

Engineer: **Engineering Firm Name**
 Contractor: **Contractor Name**

Project funded through a state revolving fund administered by  **EPA** &  **Texas Water Development Board**

210-233-XXXX | **210-704-SAWS** | **saws.org/projects**
business hours emergency

USE THE SIGN ABOVE WHEN FUNDED BY TWDB AND/OR EPA

Job No. **12-3456**  **San Antonio Water System** Cost: **\$1,234,567**



PROJECT NAME FIRST LINE
PROJECT NAME SECOND LINE

Engineer: **Engineering Firm Name**
 Contractor: **Contractor Name**

210-233-XXXX | **210-704-SAWS** | **saws.org/projects**
business hours emergency



Provide adequate supports for sign (as site conditions may require) and keep sign a proper distance above prevailing grade to permit public viewing.

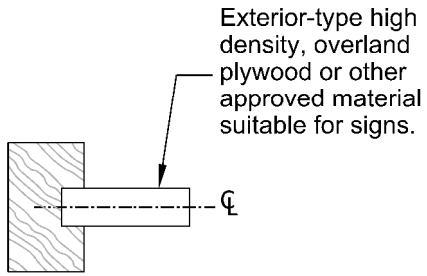

SECTION A-A

Exterior-type high density, overlaid plywood or other approved material suitable for signs.

Notes:

- SAWS logo (with lettering) and all other lettering is black (sized to fit space) on a white background in color.
- 4'x8' sheet of 3/4" plywood, Grade A-C
- Signs to be placed in prominent location along a major thoroughfare within the project limits
- Do not modify the EPA or TWDB logo when being used.
- Sign Typeface is Myriad Pro.
- Editable template files and logos can be downloaded from the SAWS website at www.saws.org. Look in the "Business Center" section for the "Construction Specifications" page

PROPERTY OF SAN ANTONIO WATER SYSTEM SAN ANTONIO, TEXAS	PROJECT SIGN FOR SAWS CONSTRUCTION	APPROVED	REVISED
		March 2008	July 2019
		DD-869-01	
			SHEET <u>1</u> OF <u>1</u>