



Multiple Sewershed Package 11A

SAWS construction work on this project will rehabilitate approximately 1.55 miles of 8-inch and 10-inch gravity sewer main utilizing Cured-in-place method. The sewer mains are located in multiple locations throughout San Antonio. These locations are in COSA and TxDOT public right of way and in private property. This project is part of the work required by San Antonio’s agreement with the U.S. EPA to address condition constrained sewer infrastructure across the city.

When Will Work Occur?

Construction is planned for the fall of 2019. Estimated construction duration is 365 calendar days.


Construction Elements:

- ✓ Construction of this project will be in multiple location within the City of San Antonio.
- ✓ Approximately 8,120 linear feet of 8-inch and 105 Linear feet of 10-inch sanitary sewer main are to be rehabilitated using CIPP.
- ✓ Construction along COSA and TxDOT right of way, CoSA Parks, and private property.

For more information:

SAWS Contract Administration
Diana Woltersdorf
210-233-3372

SAWS Public Relations
Cecilia Picazo
210-233-3750

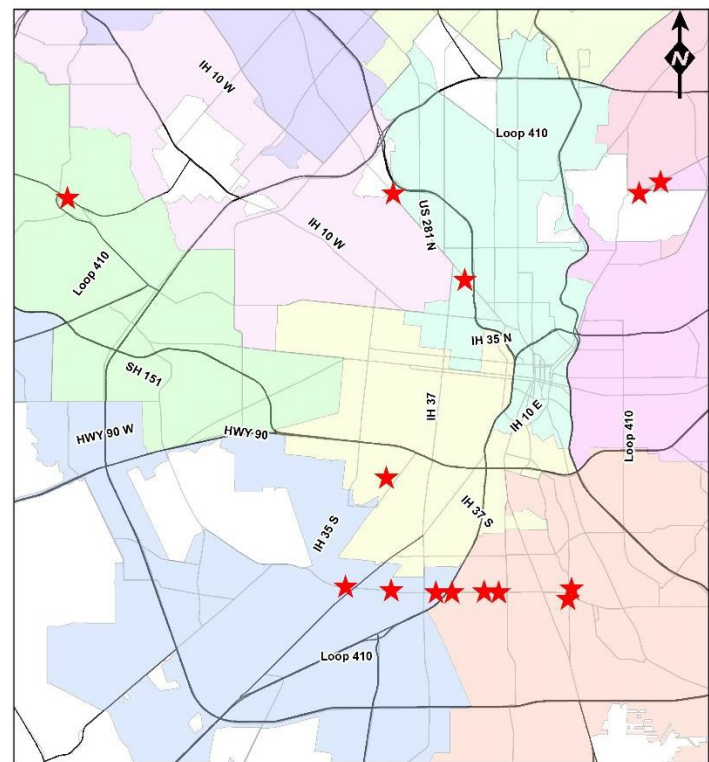

LEGEND

★ Project Location

MULTIPLE SEWERSHED PACKAGE 11A

