



Multiple Sewershed Package 7B

SAWS construction work on this project will rehabilitate approximately 0.68 miles of 24-inch gravity sewer. The sewer mains are located within Fort Sam Houston on the Ft. Sam Houston Golf Course. This project will be rehabilitating deteriorated pipe using Cure-in-Place Pipe method. This project is necessary to replace and rehabilitate sewer infrastructure due to condition and was prioritized as part of the EPA Consent Decree.

When Will Work Occur?

Construction is planned for the winter of 2019. Estimated construction duration is 6 months.

Construction Elements:

- ✓ Construction of this project will be within Fort Sam Houston on the Ft. Sam Houston Golf Course.
- ✓ Approximately 3,570 linear feet of 24-inch reinforced concrete pipe sanitary sewer main are to be rehabilitated using CIPP.
- ✓ Project is on military property within a SAWS easement.

For more information:

SAWS Contract Administration


Diana Woltersdorf

210-233-3372

SAWS Public Relations

Cecilia Picazo

210-233-3750

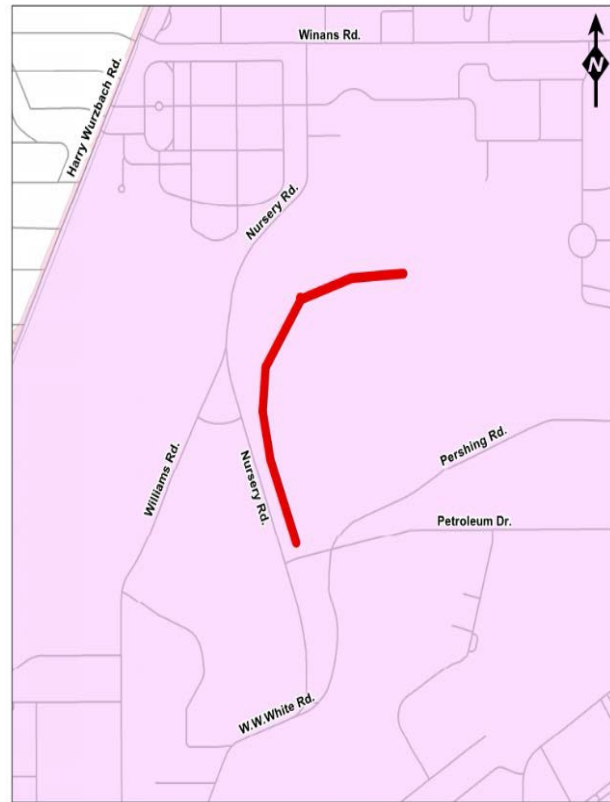

LEGEND

— Project Location

MULTIPLE SEWERSHED PACKAGE 7B



