



Multiple Sewershed Package 8 - Replacement

SAWS construction work on this project will rehabilitate approximately 0.63 miles of 8-inch through 15-inch sewer main throughout the central sewershed. Sewer mains are located within TxDOT Right of Way of US Hwy 281, IH 10 East, and IH 35 North. This project is part of the work required by San Antonio's agreement with the U.S. EPA to rehabilitate deteriorated sewer infrastructure across the city.

When Will Work Occur?

Construction is planned for the December 2019. Estimated construction duration is 8 months.

Construction Elements:

- ✓ Construction work along IH 35 near Stafford St and Calhoun St involves the replacement of approximately 1163 linear feet of 10-inch to 12-inch sewer main via open cut method.
- ✓ Construction work along U.S. 281 south of Bitters Rd involves the replacement of approximately 740 linear feet of 12-inch to 15 inch sewer main via open cut and boring methods.
- ✓ Construction work along IH 10 near Morningview Dr involves the replacement of approximately 420 linear feet of 12-inch to 18-inch sewer via open cut and jack and boring methods.
- ✓ Construction work along IH 10 from Ferris Ave. to Martin Luther King Dr involves the replacement of approximately 998 linear feet of 12-inch to 18-inch sewer main via open cut method.


For more information:

SAWS Contract Administration

Diana Woltersdorf
210-233-3372

SAWS Public Relations

Cecilia Picazo
210-233-3750

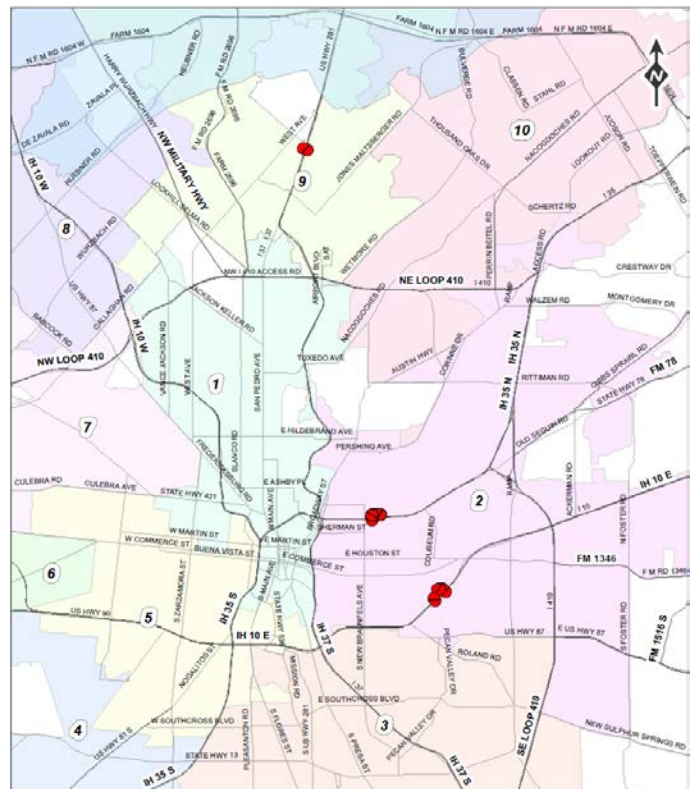

**Multiple Sewershed Package 8
Replacement (Job # 17-4560)**

