



# Loop 410 at Valley Hi Dr Bore Project

SAWS construction work on this project will include the installation of approximately 429 LF of 10-inch gravity sewer main via Auger Bore and approximately 78 LF of 10-inch gravity sewer main via Open Cut methods as well as the grout abandonment of approximately 458 LF of 10-inch gravity sewer main at highway Loop 410 and Valley Hi Dr. This contract will address wastewater mains in need of repair based on condition assessment through the Capacity, Management Operations, and Maintenance (CMOM) Program.

## When Will Work Occur?

Construction is planned for third quarter of 2024. Estimated construction duration is 210 calendar days.

## Construction Elements:

- ✓ Installation of approximately 429 LF of 10-inch gravity sewer main via Auger Bore
- ✓ Installation of approximately 78 LF of 10-inch gravity sewer main via Open Cut
- ✓ Grout abandonment of approximately 458 LF of existing 10-inch gravity sewer main
- ✓ Installation and removal of associated manholes
- ✓ Bypass of small diameter sanitary sewer is required
- ✓ Traffic Control required within TxDOT ROW

## For more information:

### Engineering Contact:

Ann Peche, P.E.

Engineering Manager – Pipelines

[Ann.Peche@saws.org](mailto:Ann.Peche@saws.org)


### SAWS Public Relations

Byron Gipson

210-233-2977

Cecilia Picazo

210-233-3750

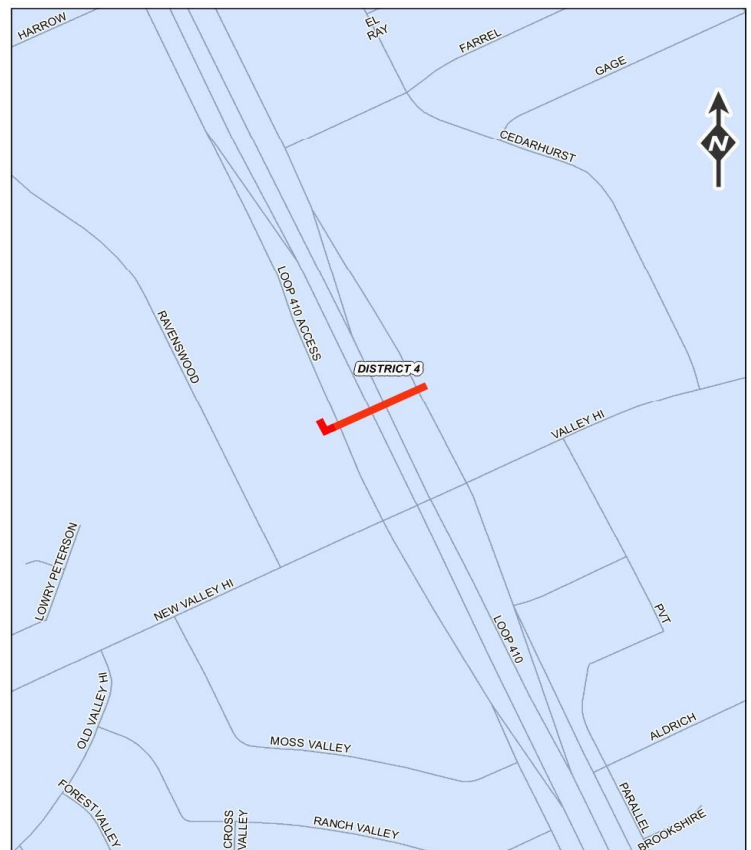

**LOOP 410 AT VALLEY HI DR BORE PROJECT**

Legend  
 Project Site

